

economical - environmental - effective  
**Conveying machine „TW“**

**PERKUTE Maschinenbau GmbH**

Düsterbergstraße 10  
48432 Rheine - Germany  
Phone +49 5971/80816-80  
Fax +49) 5971/80816-81  
E-Mail: [info@perkute.de](mailto:info@perkute.de)  
[www.perkute.de](http://www.perkute.de)



# Conveying machine „TW“

# PERKUTE


Industrielle Teilereinigung

Conveying machines suitable for continuous parts cleaning with high output.

As the conveying machines are manufactured according to customers requirements they are easily integrated in the existing production layout. A variety of transportation systems and the possibility of integration allows for a very large application area; e.g. cleaning of massproduced goods, boxes, containers and pallets.

## Basic equipment:

- Made of stainless steel
- Compact modular construction
- Wide range of basic equipment
- Variable zone separation
- Lateraly build-up tank, filter baskets for forced filtration incl.
- Temperature indicator for every region
- Low water pressure switch as dry-run protection
- Minimum operating cost because of tank insulation
- Maintenance hatch in the hoods (lockable)
- Suction channel in all zones, throttles incl.
- Cock in front of the pump
- Control system Siemens Logo TD

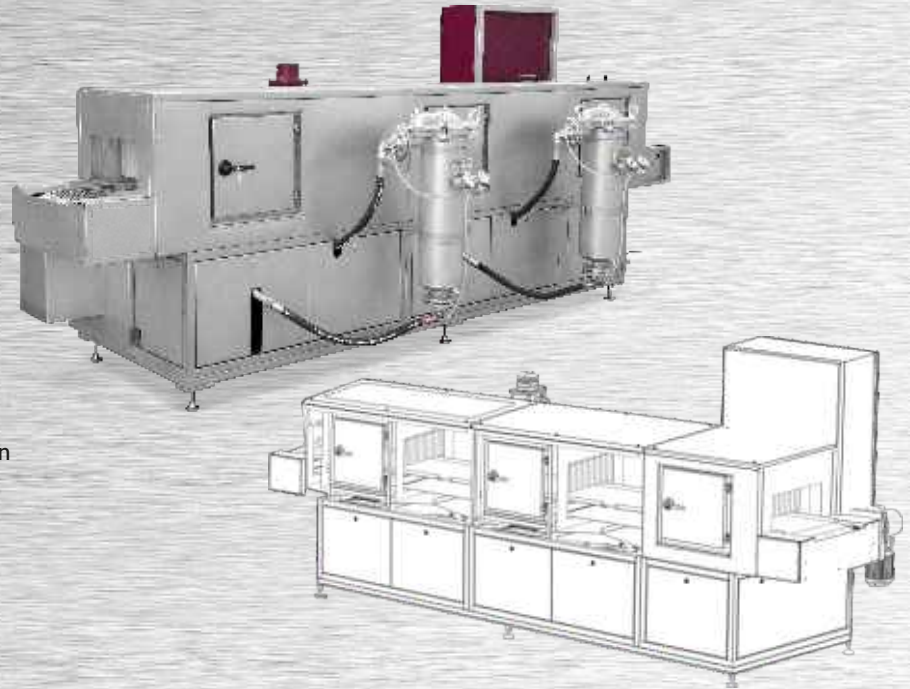


Engineering room without casing



Example: Blast pipe system (adaptiv) incl. adjustable fan nozzles



Example: drying system high pressure blow off

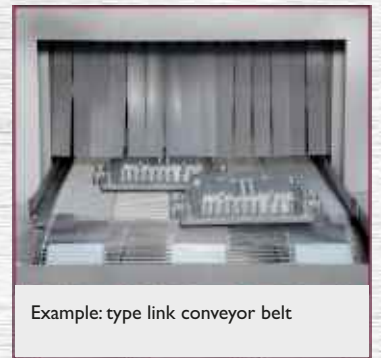

Example: type link conveyor belt

### Technical Data TW:

<b>Clean-o-mat TW</b>	<b>TW 102</b>	<b>TW 103</b>	<b>TW 104</b>	<b>TW 105</b>	<b>TW 106</b>	<b>TW 108</b>
Tunnel passage (W x H) Loading/unloading height approx.	200 x 200 mm 930 mm	300 x 200 mm 930 mm	400 x 200 mm 930 mm	500 x 200 mm 930 mm	600 x 200 mm 930 mm	800 x 200 mm 930 mm
Liquid volume WT	300/ 600 l	300/ 600 l	300/ 600 l	300/ 600 l	300/ 600 l	300/ 600 l
Pump motor WT	1,5 kW	1,5 kW	1,5/ 4 kW	1,5 kW/ 4 kW	1,5 kW/ 4 kW	1,5 kW/ 4 kW
Injection pressure WT	3 bar	3 bar	3/ 5 bar	3/ 5 bar	3/ 5 bar	3/ 5 bar
Pump flow rate WT	200 l/min	200 l/min	200 l/min	200/ 280 l/min	200/ 280 l/min	200/ 280 l/min
Rating	230/400 V 50 Hz	230/400 V 50 Hz	230/400 V 50 Hz	230/400 V 50 Hz	230/400 V 50 Hz	230/400 V 50 Hz
Heating capacity WT	18/ 27 kW	18/ 27 kW	18/ 27 kW	18/ 27 kW	18/ 27 kW	18/ 27 kW
Blower drying	5,5 kW	5,5 kW	5,5 kW	5,5 kW	5,5 kW	7,5 kW
Total	-height -depth (300 l) -depth (600 l) -length -weight	1840 mm 1050 mm 1650 mm	1840 mm 1050 mm 1650 mm	1840 mm 1050 mm 1650 mm	1840 mm 1050 mm 1650 mm	1840 mm 1250 mm 1850 mm

Depends on the Zone number

No liability accepted for specifications, which are subject to alteration.

Tailor-made machines to be quoted on request.